



## EPM-U25S 系列概述

### 一.电源规格:

电源型号(MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPM-U25S3.3	100~240VAC	3.3V/6A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S5	100~240VAC	5V/5A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S8.5	100~240VAC	8.5V/3A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S12	100~240VAC	12V/2.1A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S15	100~240VAC	15V/1.7A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S24	100~240VAC	24V/1.1A	SCP/OCP/OVP	143mm*58mm*38*mm
EPM-U25S48	100~240VAC	48V/0.5A	SCP/OCP/OVP	143mm*58mm*38*mm

### 二.系列特性:

#### Features:

- Universal AC input / Full range
- Compact size
- Protections: SCP /OCP/ OVP
- High efficiency
- Low cost, high reliability
- 100% full load burn-in test
- 1 years warranty


### 三.产品外观:




Net weight: 250g

### 四：工作温度，输出功率曲线以及负载曲线图：

Temperature- load curve

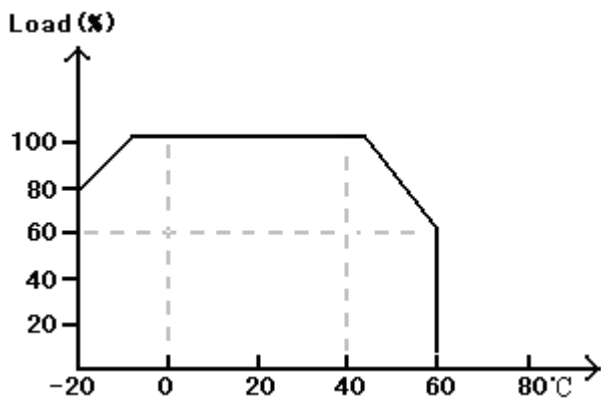

Input voltage- load curve

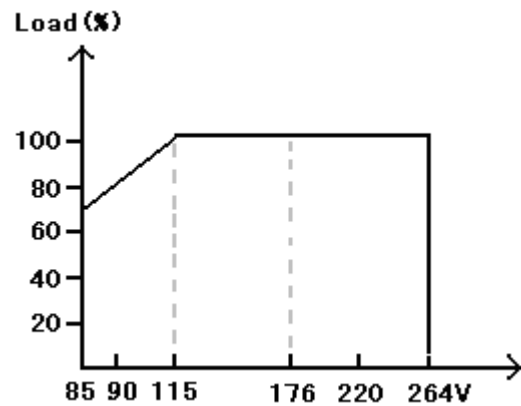

### 五：测试标准：

#### EMC DATA:

##### 1、 EMI

RE/CE	EN55022	CLASS A
Harmonics Current	EN61000-3-2	


## 2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC: ±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900 ± 5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A

## 六：安装尺寸：


build in dimension

unit: mm

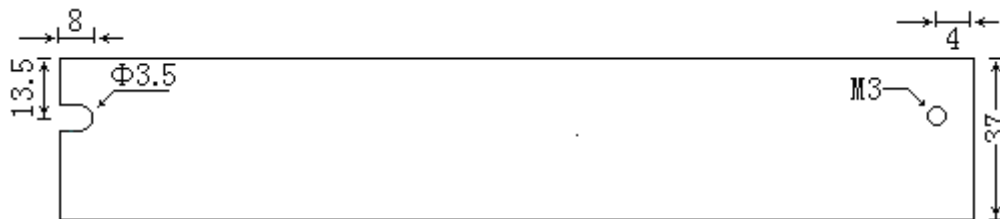

## 七: 标签:


## Spec Label

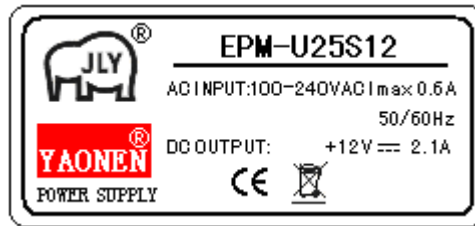


## Connector define



## 八: 包装:

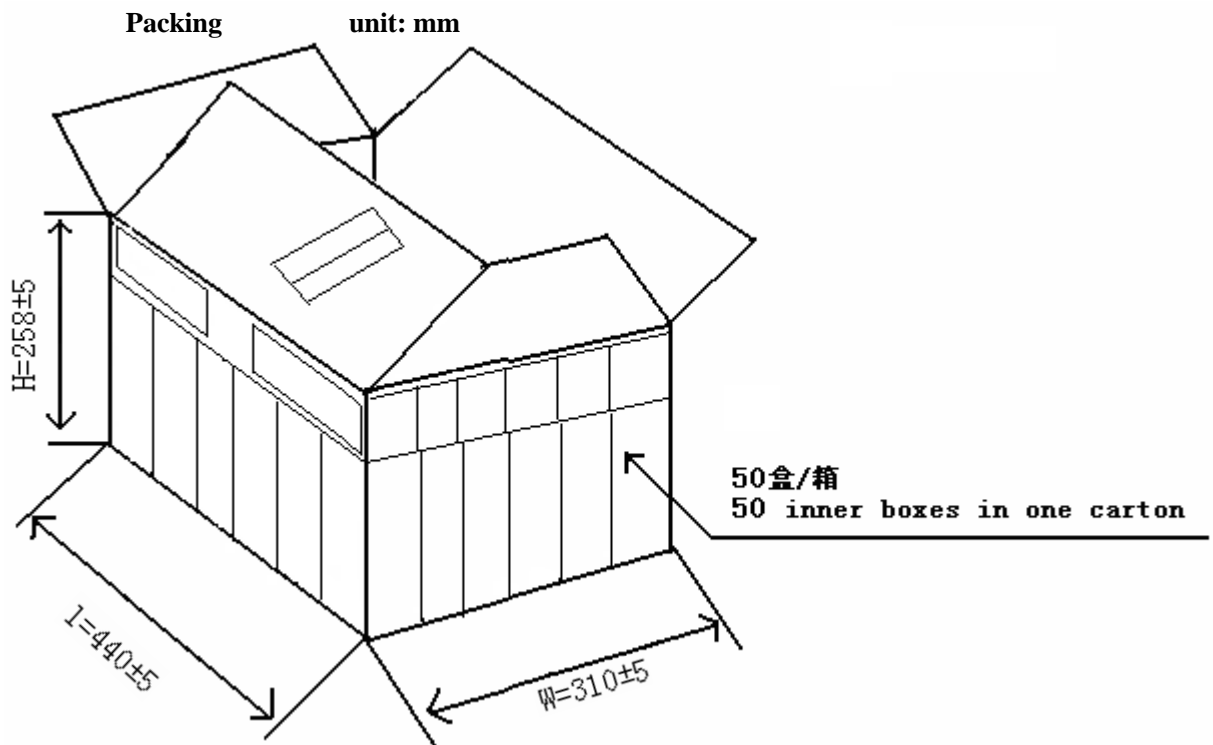

## Inner Box plane

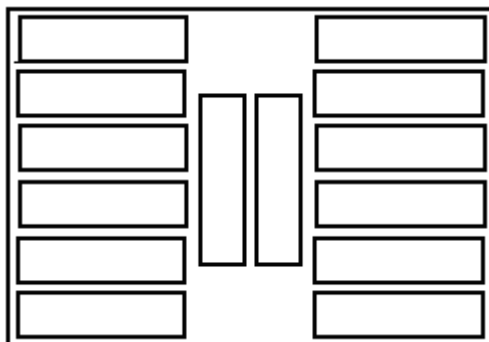

## solid

