



EPM-S100D 系列概述

一. 电源规格:

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPM-S100D12+24	90-132VAC' 176-264VAC	12V/5A; 24V/3A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100D12+36	90-132VAC' 176-264VAC	12V/6A; 36V/1.5A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100D24-24	90-132VAC' 176-264VAC	24V/3A; -24V/2A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100D26+9	90-132VAC' 176-264VAC	26V/5A; 9V/4A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100D5+12	90-132VAC' 176-264VAC	5V/10A; 12V/4A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100D5+24	90-132VAC' 176-264VAC	5V/6A; 24V/3A	SCP/OCP/OVP	198mm*98mm*39mm

二. 系列特性:

Features:

- AC input range selectable by switch
- Compact size
- Protections: SCP /OCP/ OVP
- High efficiency, high reliability
- 100% full load burn-in test
- 1 years warranty


三. 产品外观:



net weight: 670g



四. 工作温度, 输出功率曲线:

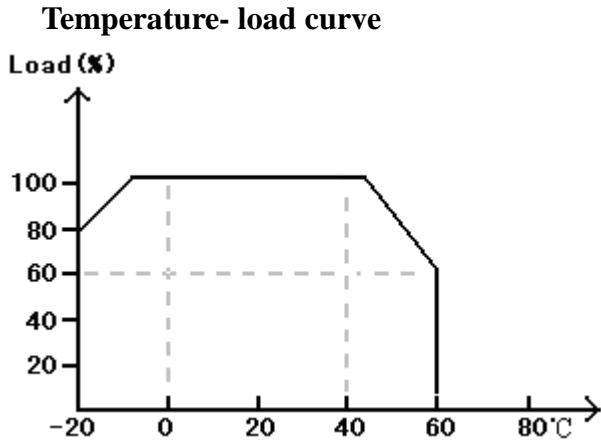

五. 测试标准:

EMC DATA:

1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2

2、 EMS


ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	EN50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A



六. 安装尺寸:

build in dimension


unit: mm

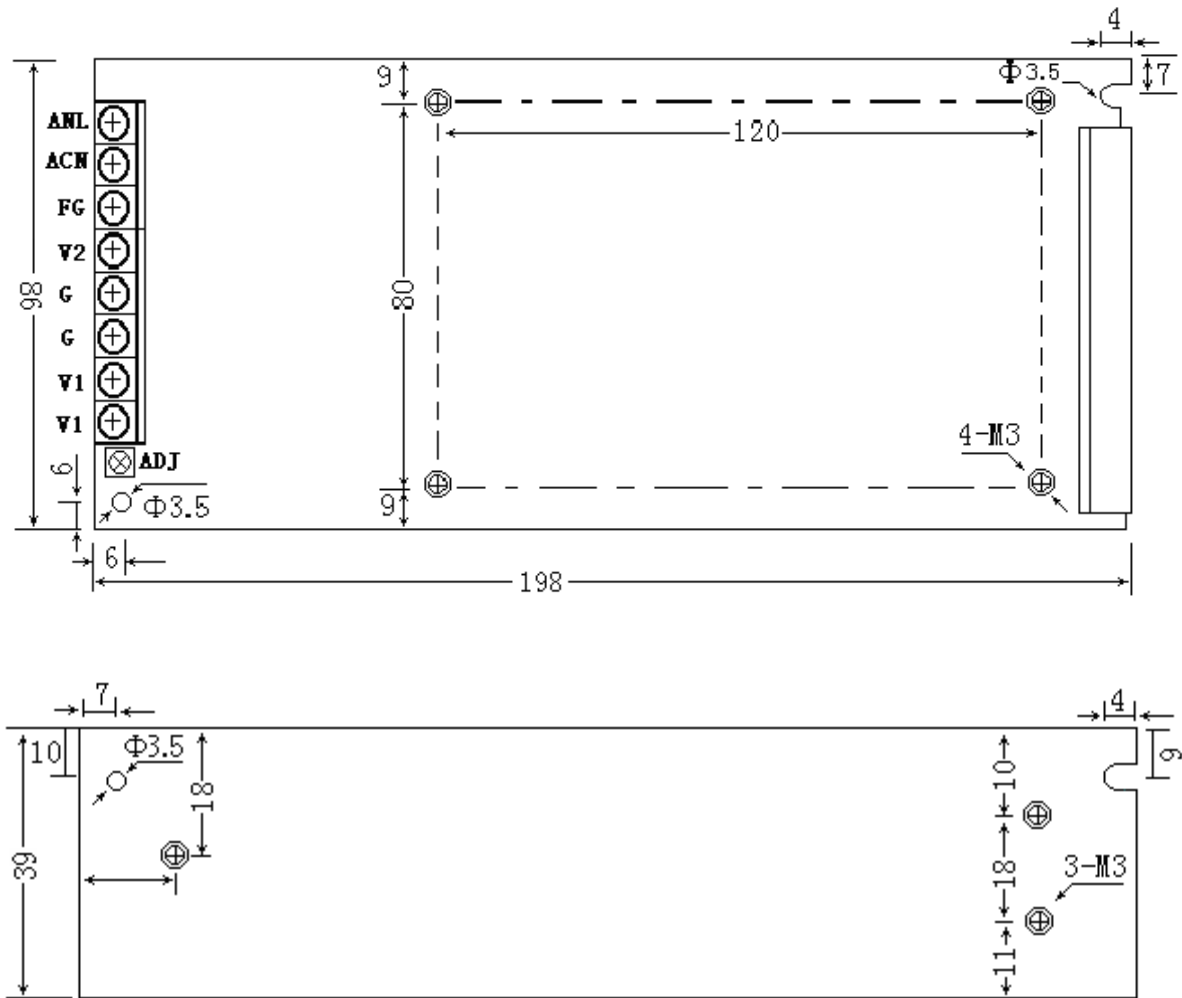




七. 标签:

Spec Label

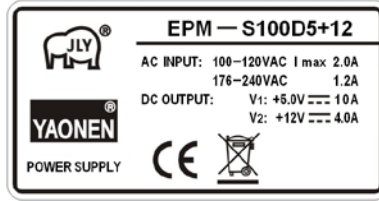


Connector define




八. 包装:

Packing unit: mm

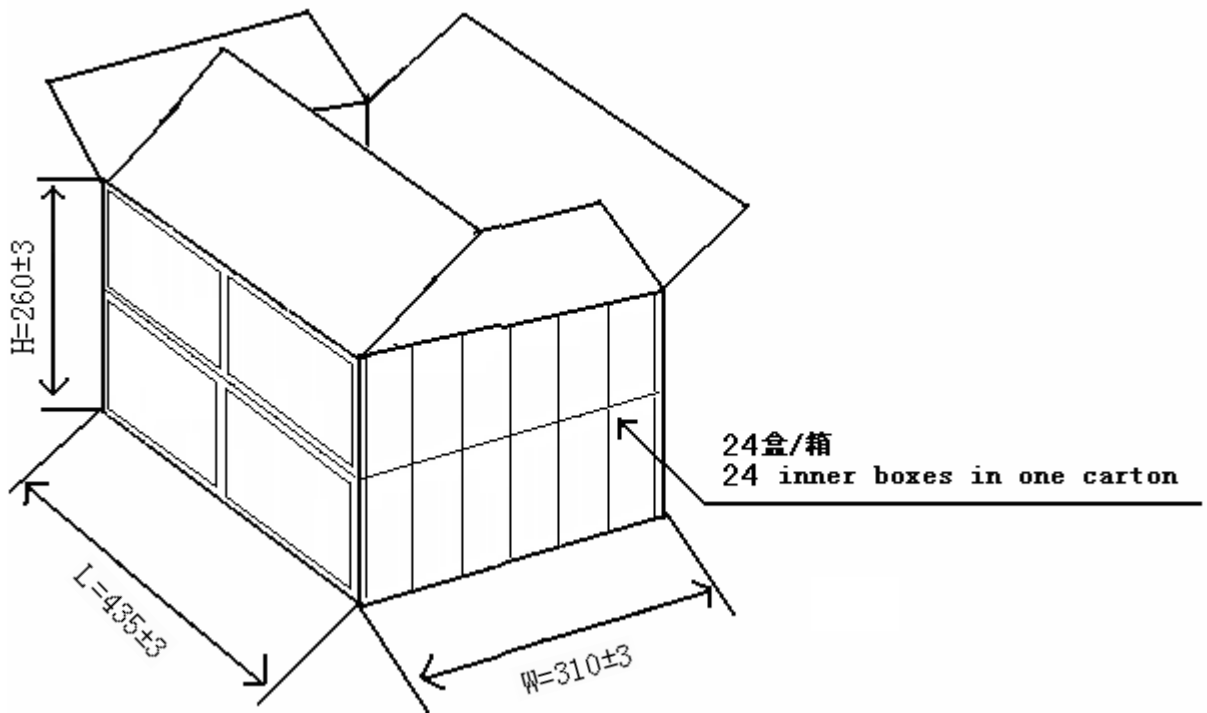

Inner Box plane

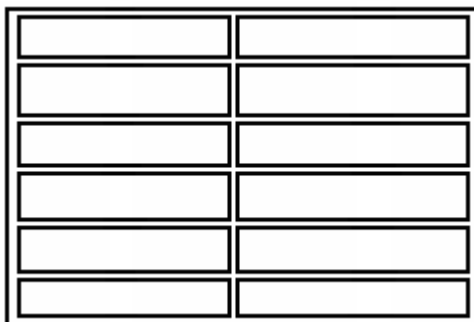

solid

