



## ADP-H40S 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入 (VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
ADP-H40S5	176-240VAC	5V/4A	SCP/OCP/OVP	120mm*60mm*38mm
ADP-H40S12	176-240VAC	12V/3.3A	SCP/OCP/OVP	120mm*60mm*38mm
ADP-H40S24	176-240VAC	24V/2A	SCP/OCP/OVP	120mm*60mm*38mm
ADP-H40S48	176-240VAC	48V/1A	SCP/OCP/OVP	120mm*60mm*38mm

### 二. 系列特性:

#### Features:

AC input 176-240VAC only

Miniature

Protections: SCP /OCP/ OVP

High efficiency, high reliability

100% full load burn-in test


1 years warranty

### 三. 产品外观:



net weight: 270g

## 四. 工作温度，输出功率曲线：

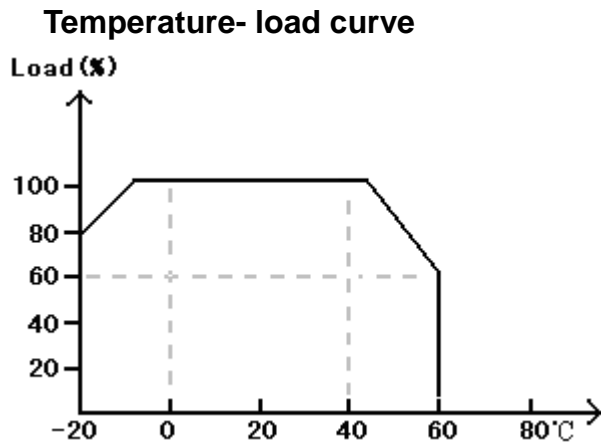

## 五. 测试标准：

EMC DATA:

## 1、 EMI

RE/CE	EN55022 CLASS B
Harmonics Current	EN61000-3-2


## 2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A


## 六. 安装尺寸:

## build in dimension

unit: mm

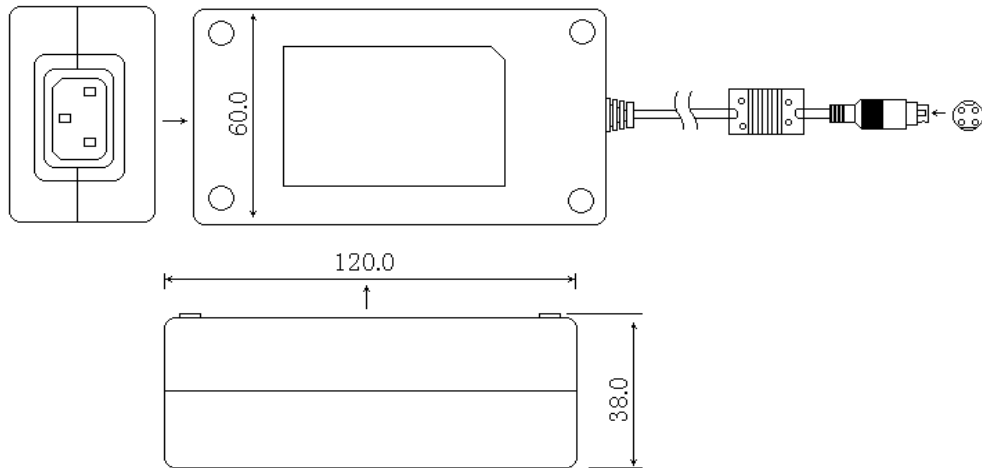


## Connection

OUTPUT:  $\Phi 2.1$  plugs


## 七. 标签:

## Spec Label

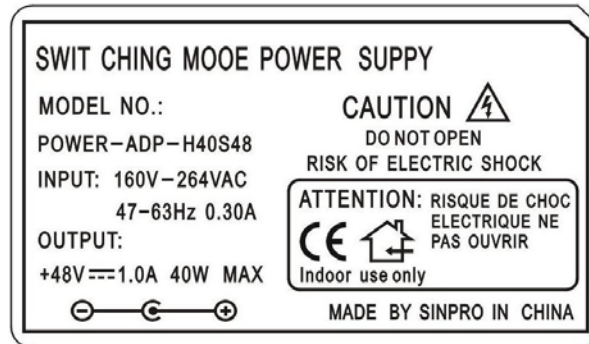


## 八. 包装:

## Packing unit: mm

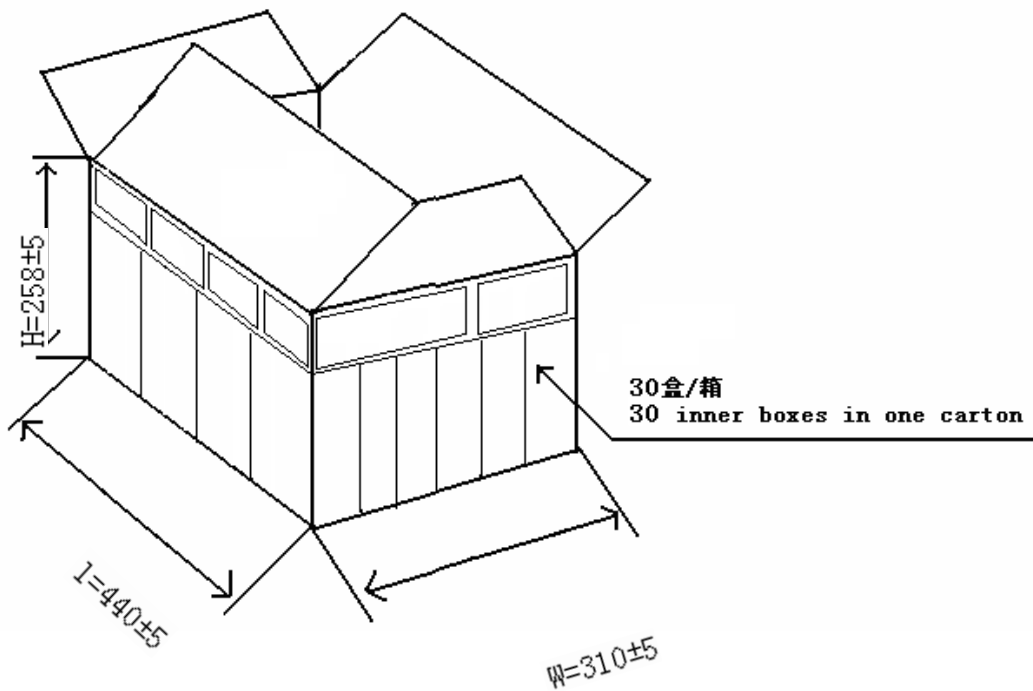

## Inner Box plane

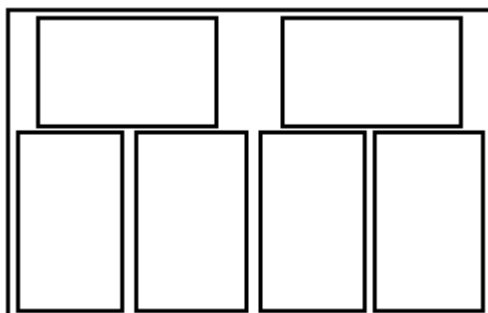

## solid

