



## EPM-U45D 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入 (VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPM-U45D5+12	100-240VAC	5V/4A; 12V/2A	SCP/OCP/OVP	129mm*98mm*38mm
EPM-U45D5+24	100-240VAC	5V/3A; 24V/1.3A	SCP/OCP/OVP	129mm*98mm*38mm
EPM-U4512-12	100-240VAC	12V/2A; -12V/2A	SCP/OCP/OVP	129mm*98mm*38mm
EPM-U45D26+9	100-240VAC	26V/1.5A; 9V/1A	SCP/OCP/OVP	129mm*98mm*38mm

### 二. 系列特性:

#### Features:

- Universal AC input / Full range
- Compact size
- Protections: SCP /OCP/ OVP
- Low cost, High reliability
- 100% full load burn-in test
- 1 years warranty

### 三. 产品外观:




net weight: 390g




## 四. 工作温度，输出功率曲线以及负载曲线图：

Temperature- load curve

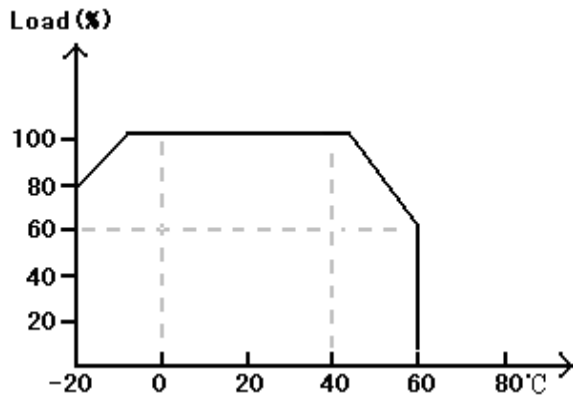

Input voltage- load curve

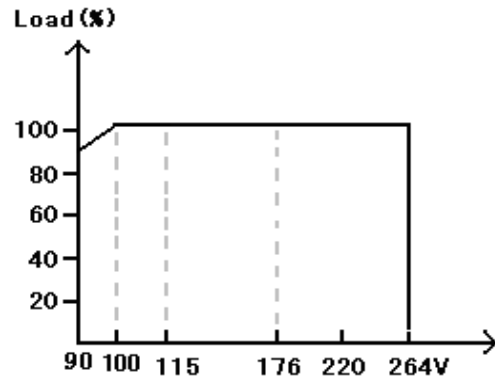

## 五. 测试标准：

## EMC DATA:

## 1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2

## 2、 EMS


ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC: ±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A



六. 安装尺寸:

build in dimension


unit: mm

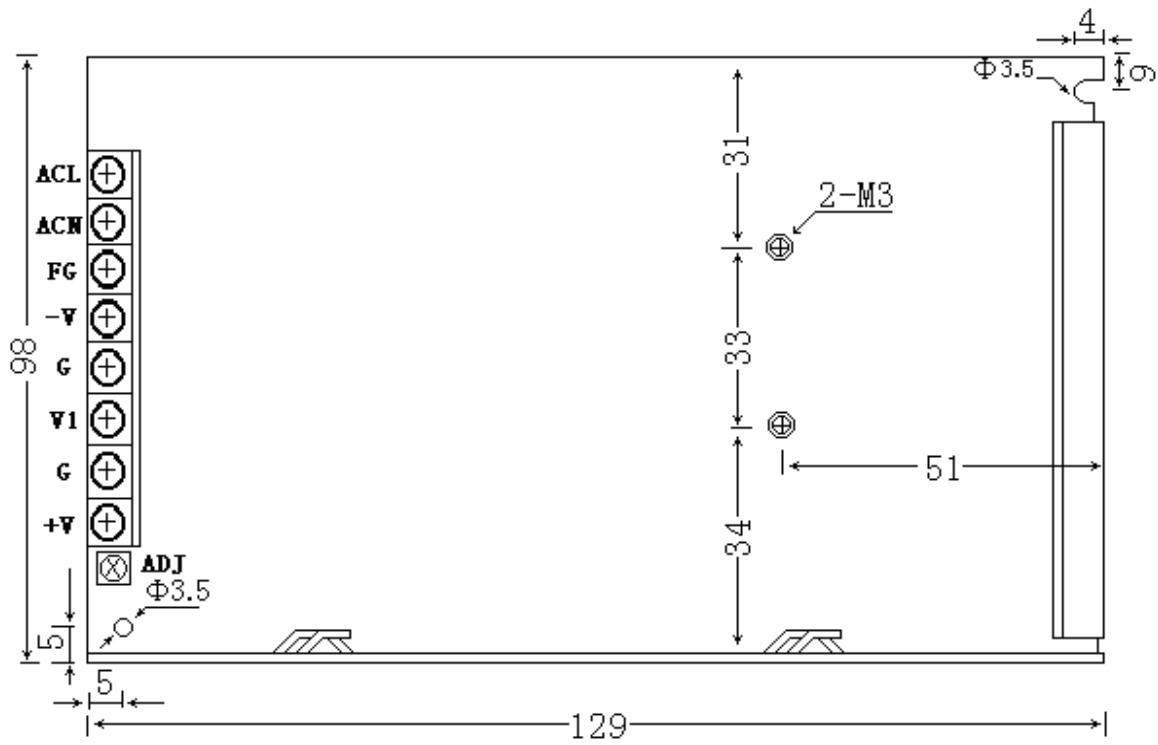




七.标签:

Spec Label

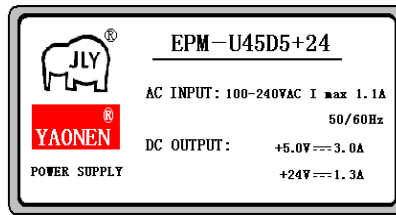


Connector define



八.包装:

Packing unit: mm

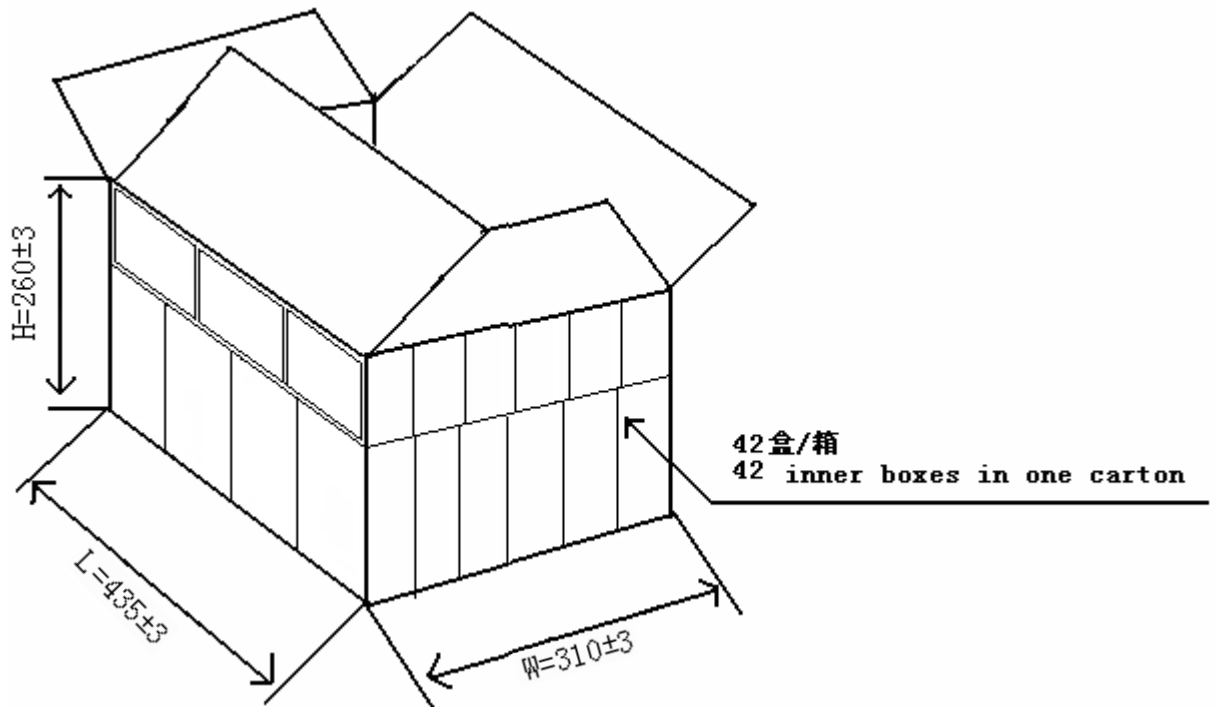

Inner Box plane

solid

