

EPT-H350S 系列概述

一. 电源规格:

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPT-H350S12	100-120VAC/176-240VAC	12V/29A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S15	100-120VAC/176-240VAC	15V/23A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S24	100-120VAC/176-240VAC	24V/14.5A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S28	100-120VAC/176-240VAC	28V/12.5A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S36	100-120VAC/176-240VAC	36V/9.5A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S40	100-120VAC/176-240VAC	40V/8.5A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S48	100-120VAC/176-240VAC	48V/7.3A	SCP/OCP/OTP/OVP	227mm*115mm*50mm
EPT-H350S63	100-120VAC/176-240VAC	63V/5.5A	SCP/OCP/OTP/OVP	227mm*115mm*50mm

二. 系列特征:

Features:

AC input range selectable by switch

Compact size

Protections: SCP /OCP/ OTP /OVP

Forced air cooling by built-in DC fan

Low cost, high reliability, high efficiency

100% full load burn-in test

1 years warranty

三. 产品外观:




net weight: 1060g

Connection: 11P/9.5mm pitch terminal block

四. 工作温度，输出功率曲线：

Temperature- load curve

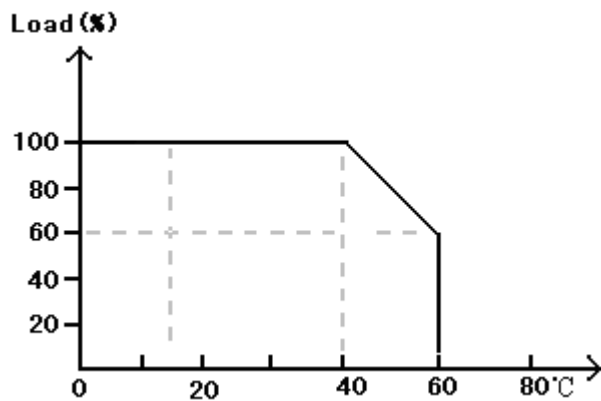

五. 测试标准：

EMC DATA:

1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2


2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:+/-2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900+/-5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A


六. 安装尺寸:

build in dimension

unit: mm

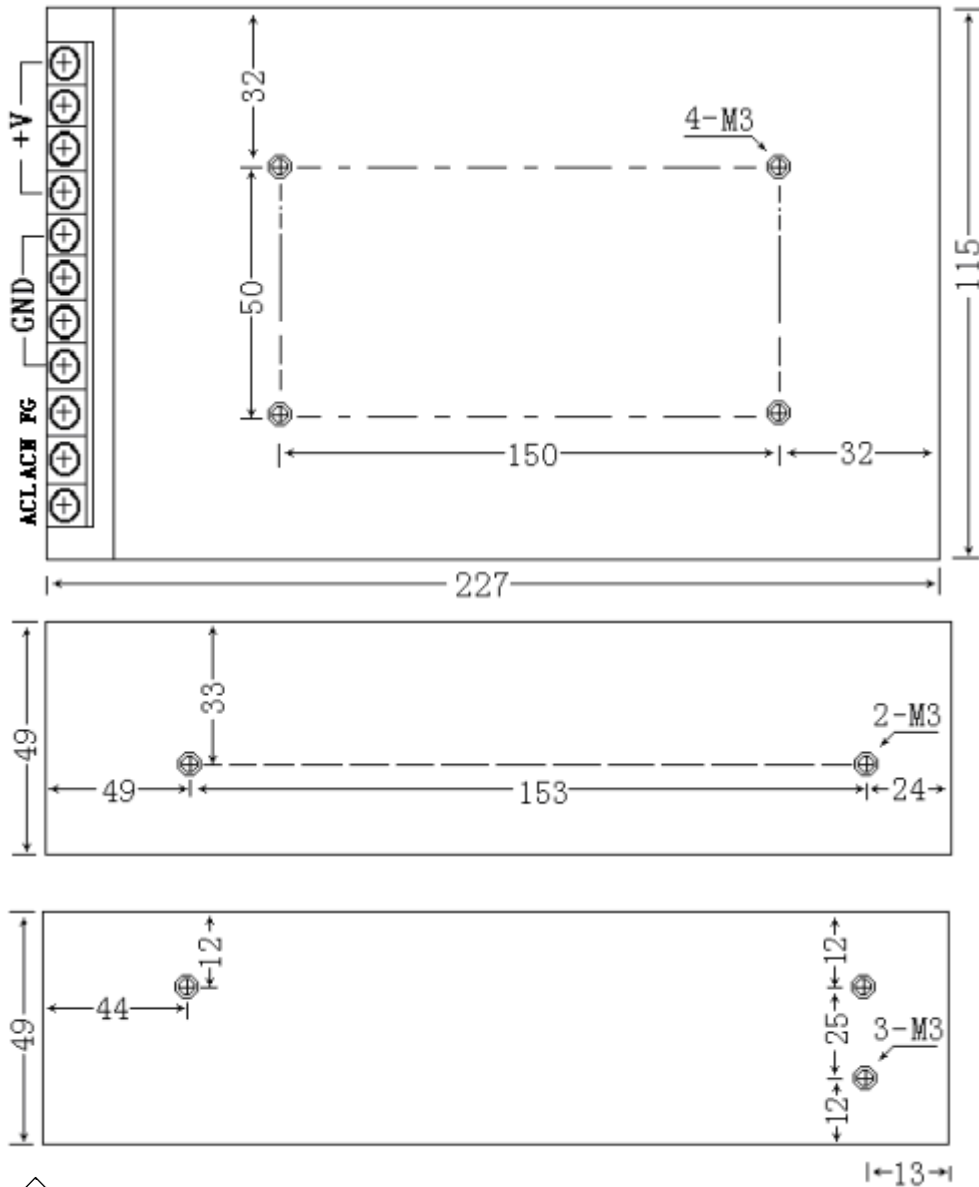

Forced air cooling by built-in DC fan

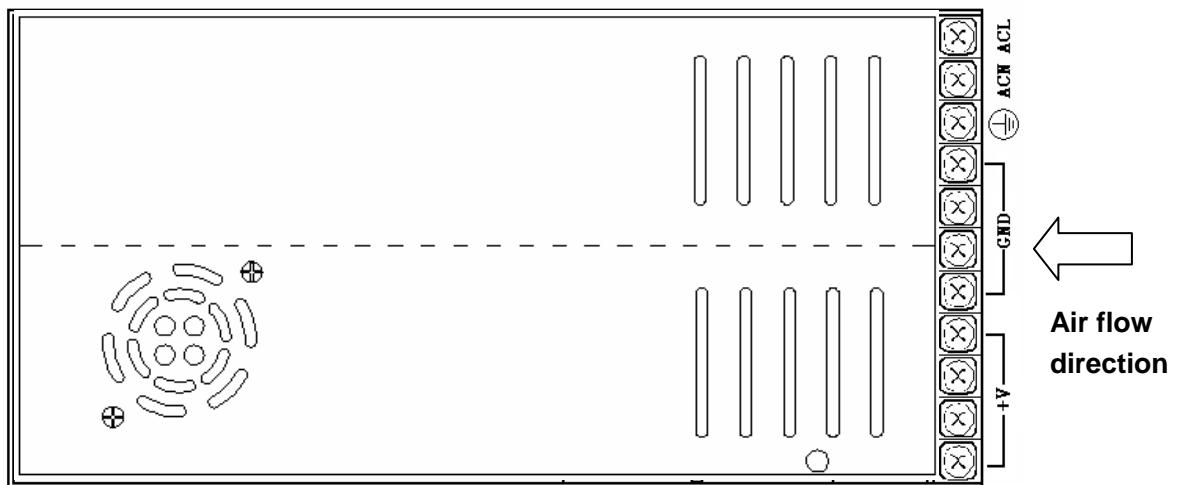


ADJ:OVTPUT ADJ




七. 标签:

Spec Label

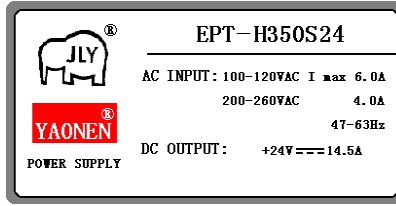

Connector define

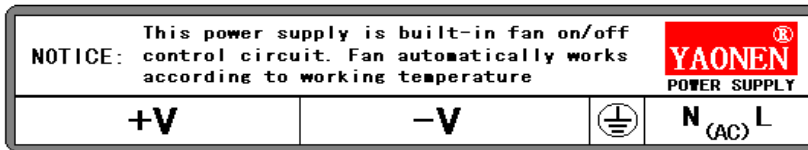


ADJ:OUTPUT ADJ




八. 包装:

Packing

unit: mm

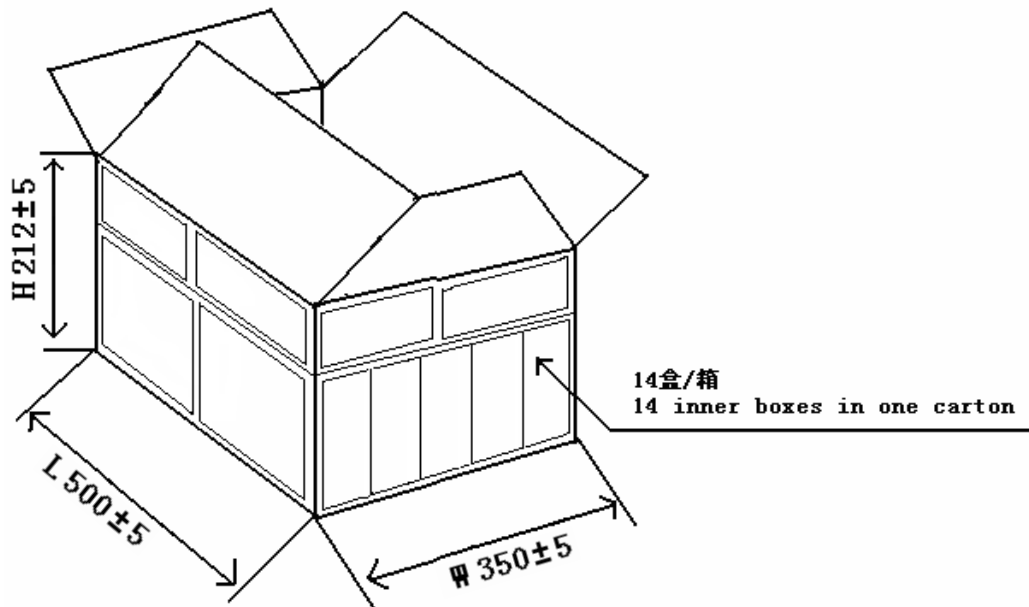

Inner Box plane

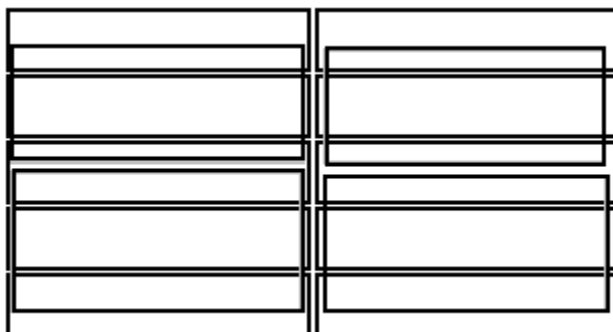

solid

