



## EPT-S150S 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入 (VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPT-S150S3.3	176-240VAC 100-120VAC	3.3V/30A	SCP/OCP/LVP	200mm*110mm*50mm
EPT-S150S5	176-240VAC 100-120VAC	5V/30A	SCP/OCP/LVP	200mm*110mm*50mm
EPT-S150S12	176-240VAC 100-120VAC	12V/12.5A	SCP/OCP/LVP	200mm*110mm*50mm
EPT-S150S18	176-240VAC 100-120VAC	18V/8.5A	SCP/OCP/LVP	200mm*110mm*50mm
EPT-S150S24	176-240VAC 100-120VAC	24V/6.25A	SCP/OCP/LVP	200mm*110mm*50mm
EPT-S150S28	176-240VAC 100-120VAC	28V/5.5A	SCP/OCP/LVP	200mm*110mm*50mm

### 二. 系列特征:

#### Features:

- Compact size
- Protections: SCP / OCP/LVP
- High efficiency
- Low cost, high reliability
- 100% full load burn-in test
- 1 years warranty


### 三. 产品外观:



Net weight 800g

**四. 工作温度，输出功率曲线:**

Temperature- load curve

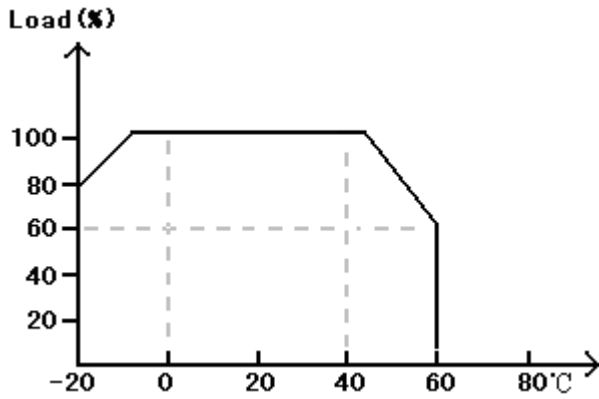**五. 测试标准:****EMC DATA:****1、 EMI**

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2

**2、 EMS**


ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A



六. 安装尺寸:

build in dimension

unit: mm

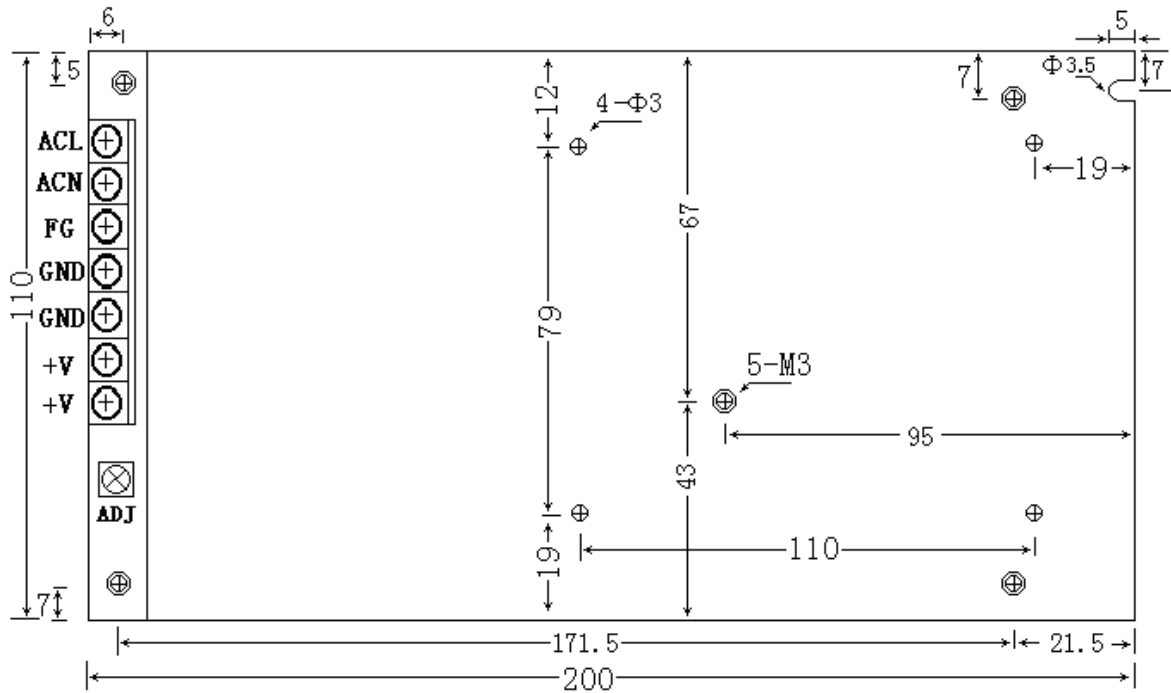



七. 标签:

Spec Label




Connector define




八. 包装:

Packing unit: mm

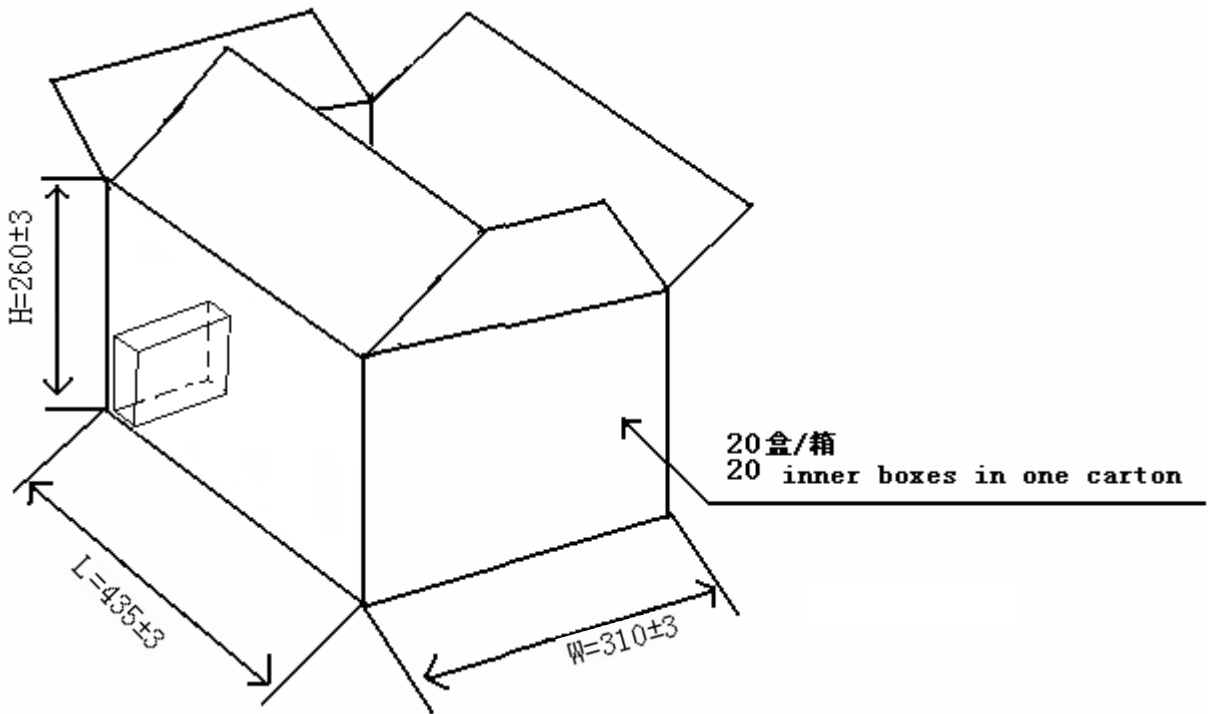

Inner Box plane

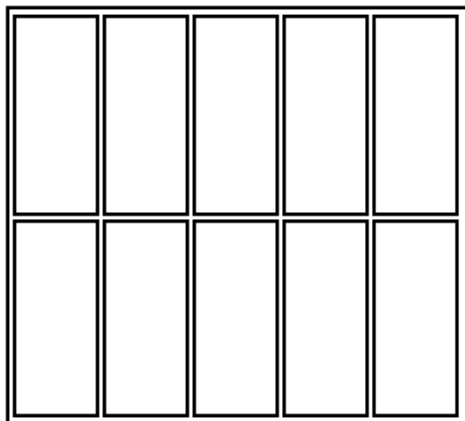

solid

